

DESIGN THAT CREATES WARMTH

www.hsflamingo.com



Technical cross section

Flamingo DELUXE ®



- Design that you desire
- Top quality workmanship
- 3 A must-see flame
- 4 Glass must be clean... and so it is
- 5 Variable flame intensity control



Precise combustion control system

To achieve the highest possible combustion control, the stove utilises two draw bars to regulate primary and secondary/tertiary air supply.



External air supply

Significantly improves the combustion process in new buildings and "air-tight" rooms.






wood stove


malia









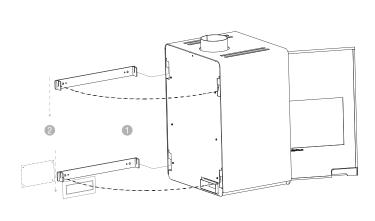



- + Top quality workmanship
- + Timeless design
- + Primary, secondary and tertiary air supply
- + Variable flame intensity
- + Insulated firebox from vermiculite
- + Ashtray


technical parameters

Nominal power kW	9
Nominal power range kW	3 - 11
Stove efficiency %	80.17
Fuel consumption kg/hour	2.9
Operating draught Pa	12 - 14
Smoke flue diameter mm	150
Log length cm	35
Weight kg	151
CO emissions (at 13% O 2) %	0.077
Average flue gas temperature °C	287
Heating value m ³	60 - 220
Warranty	5 years

black

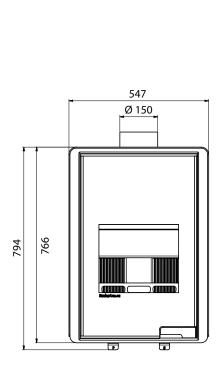



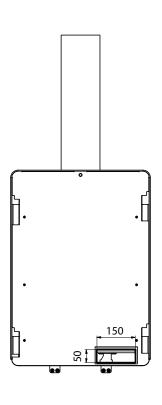



wood stove

pentai







technical parameters

Nominal power kW	9
Nominal power range kW	3 - 11
Stove efficiency %	80.17
Fuel consumption kg/hour	2.9
Operating draught Pa	12 - 14
Smoke flue diameter mm	150
Log length cm	35
Weight kg	176
CO emissions (at 13% O 2) %	0.077
Average flue gas temperature °C	287
Heating value m ³	60 - 220
Warranty	5 years

- + Top quality workmanship
- + Timeless design
- + Primary, secondary and tertiary air supply
- + Variable flame intensity
- + Insulated firebox from vermiculite
- + Ashtray

red brown - velvet cream olive grey













black

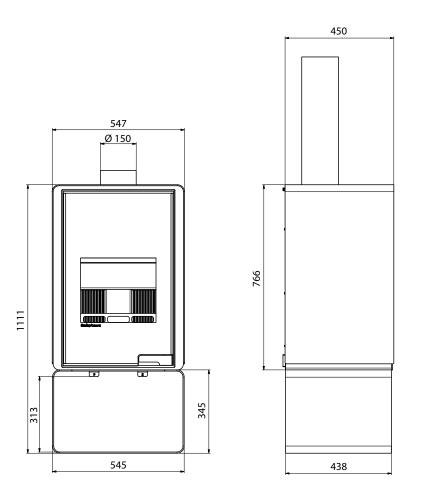

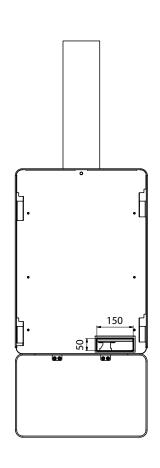











wood stove

kampa right







technical parameters

Nominal power kW	9
Nominal power range kW	3 - 11
Stove efficiency %	80.17
Fuel consumption kg/hour	2.9
Operating draught Pa	12 - 14
Smoke flue diameter mm	150
Log length cm	35
Weight kg	237
CO emissions (at 13% O 2) %	0.077
Average flue gas temperature °C	287
Heating value m ³	60 - 220
Warranty	5 years

- + Top quality workmanship
- + Timeless design
- + Primary, secondary and tertiary air supply
- + Variable flame intensity
- + Insulated firebox from vermiculite
- + Ashtray

black red cream olive grey












brown - velvet

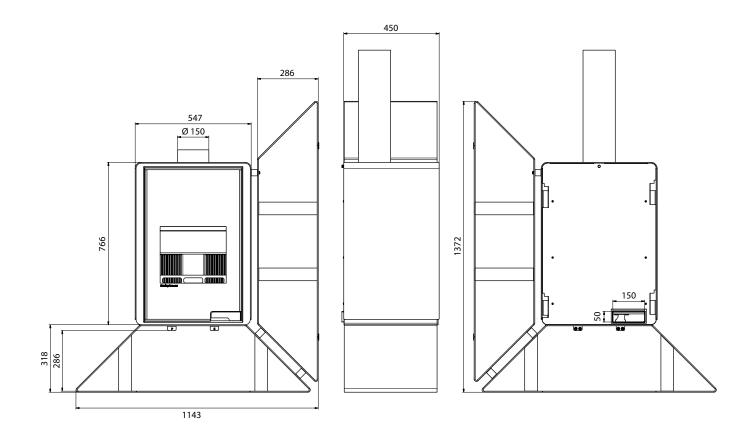











wood stove

kampa







technical parameters

Nominal power kW	9
Nominal power range kW	3 - 11
Stove efficiency %	80.17
Fuel consumption kg/hour	2.9
Operating draught Pa	12 - 14
Smoke flue diameter mm	150
Log length cm	35
Weight kg	237
CO emissions (at 13% O 2) %	0.077
Average flue gas temperature °C	287
Heating value m ³	60 - 220
Warranty	5 years

- + Top quality workmanship
- + Timeless design
- + Primary, secondary and tertiary air supply
- + Variable flame intensity
- + Insulated firebox from vermiculite
- + Ashtray

black red brown - velvet olive grey












cream

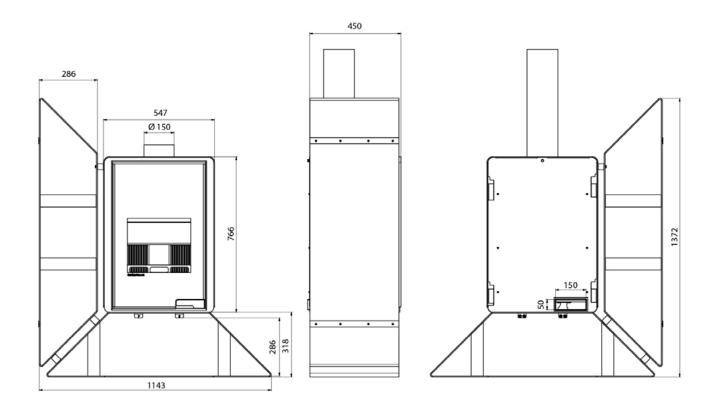











wood stove

senai







technical parameters

Nominal power kW	9
Nominal power range kW	3 - 11
Stove efficiency %	80.17
Fuel consumption kg/hour	2.9
Operating draught Pa	12 - 14
Smoke flue diameter mm	150
Log length cm	35
Weight kg	189
CO emissions (at 13% O 2) %	0.077
Average flue gas temperature °C	287
Heating value m ³	60 - 220
Warranty	5 years

- + Top quality workmanship
- + Timeless design
- + Primary, secondary and tertiary air supply
- + Variable flame intensity
- + Insulated firebox from vermiculite
- + Ashtray

black brown - velvet cream olive grey












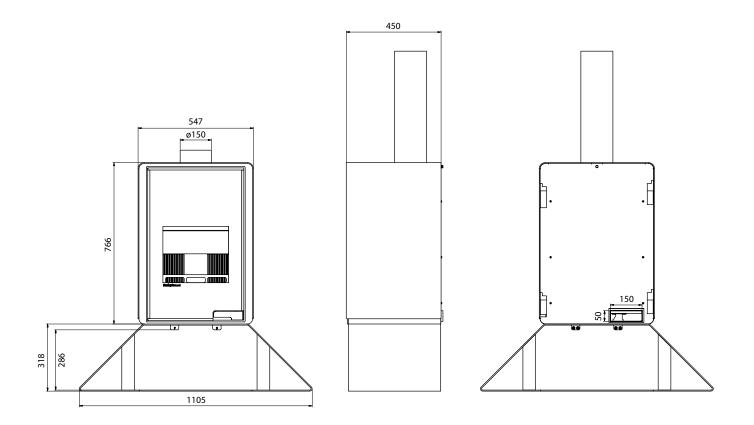











wood stove

singa







technical parameters

Nominal power kW	9
Nominal power range kW	3 - 11
Stove efficiency %	80.17
Fuel consumption kg/hour	2.9
Operating draught Pa	12 - 14
Smoke flue diameter mm	150
Log length cm	35
Weight kg	196
CO emissions (at 13% O 2) %	0.077
Average flue gas temperature °C	287
Heating value m ³	60 - 220
Warranty	5 years

- + Top quality workmanship
- + Timeless design
- + Primary, secondary and tertiary air supply
- + Variable flame intensity
- + Insulated firebox from vermiculite
- + Ashtray

black red brown - velvet cream grey














olive

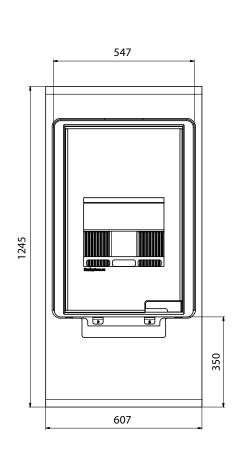

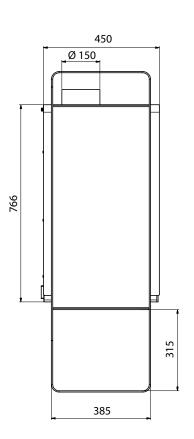

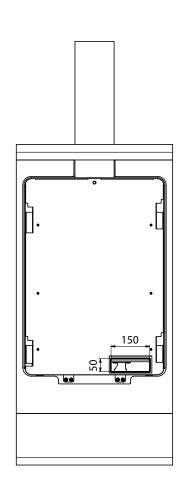











wood stove

island







technical parameters

Nominal power kW	9
Nominal power range kW	3 - 11
Stove efficiency %	80.17
Fuel consumption kg/hour	2.9
Operating draught Pa	12 - 14
Smoke flue diameter mm	150
Log length cm	35
Weight kg	180
CO emissions (at 13% O 2) %	0.077
Average flue gas temperature °C	287
Heating value m ³	60 - 220
Warranty	5 years

- + Top quality workmanship
- + Timeless design
- + Primary, secondary and tertiary air supply
- + Variable flame intensity
- + Insulated firebox from vermiculite
- + Ashtray

black red brown - velvet cream olive














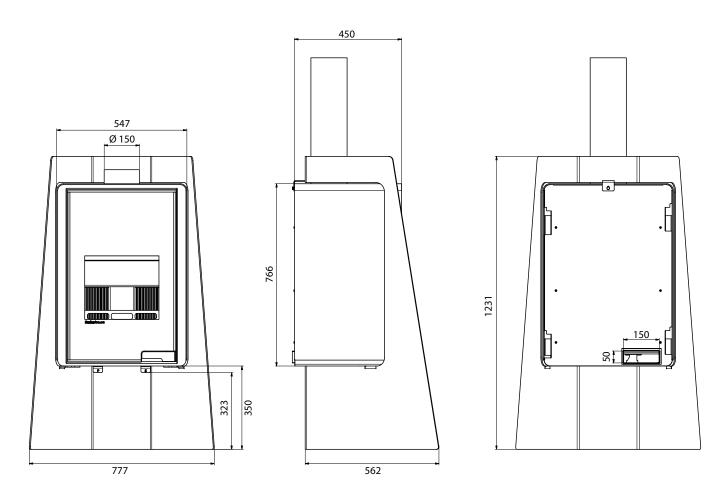



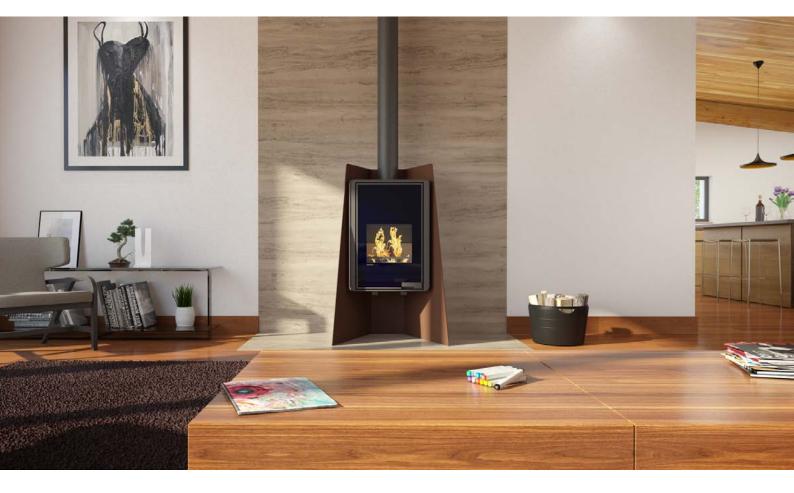



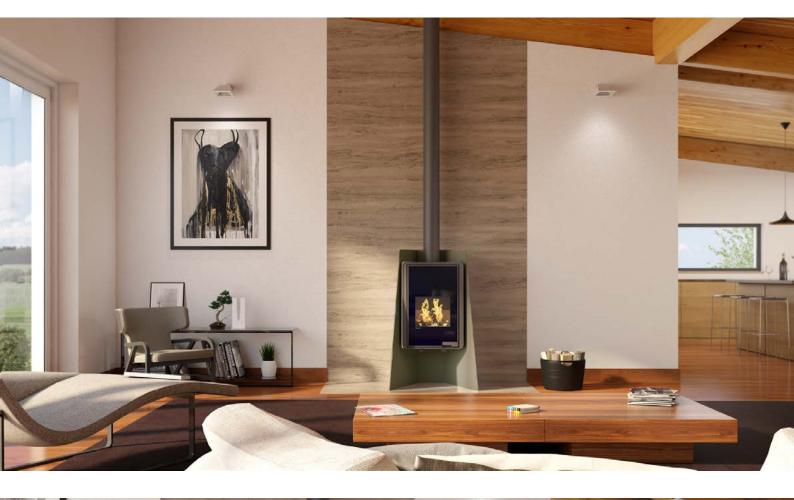



wood stove

pulau







technical parameters

Nominal power kW	9
Nominal power range kW	3 - 11
Stove efficiency %	80.17
Fuel consumption kg/hour	2.9
Operating draught Pa	12 - 14
Smoke flue diameter mm	150
Log length cm	35
Weight kg	170
CO emissions (at 13% O 2) %	0.077
Average flue gas temperature °C	287
Heating value m ³	60 - 220
Warranty	5 years

- + Top quality workmanship
- + Timeless design
- + Primary, secondary and tertiary air supply
- + Variable flame intensity
- + Insulated firebox from vermiculite
- + Ashtray

black brown - velvet cream olive grey













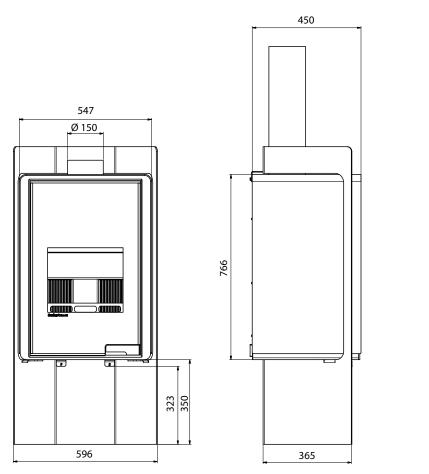

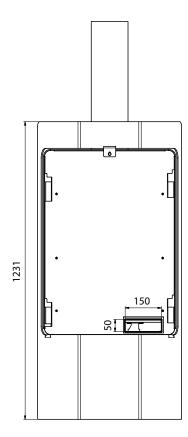











firewood rack

FD - 01



rack features

- + 5 mm metal sheet
- + Heat-resistant two-component paint
- + Same colours as other HS Flamingo products
- + 5 years warranty

black brown - velvet cream olive grey











red

firewood rack

FD - 02



rack features

- + 5 mm metal sheet
- + Heat-resistant two-component paint
- + Same colours as other HS Flamingo products
- + 5 years warranty

red brown - velvet cream olive grey











black

firewood rack

FD - 03



rack features

- + 5 mm metal sheet
- + Heat-resistant two-component paint
- + Same colours as other HS Flamingo products
- + 5 years warranty

black red brown - velvet cream grey











olive

firewood rack

FD - 04



rack features

- + 5 mm metal sheet
- + Heat-resistant two-component paint
- + Same colours as other HS Flamingo products
- + 5 years warranty

black red cream olive grey












brown - velvet

NOTES		
		_
		_
		_

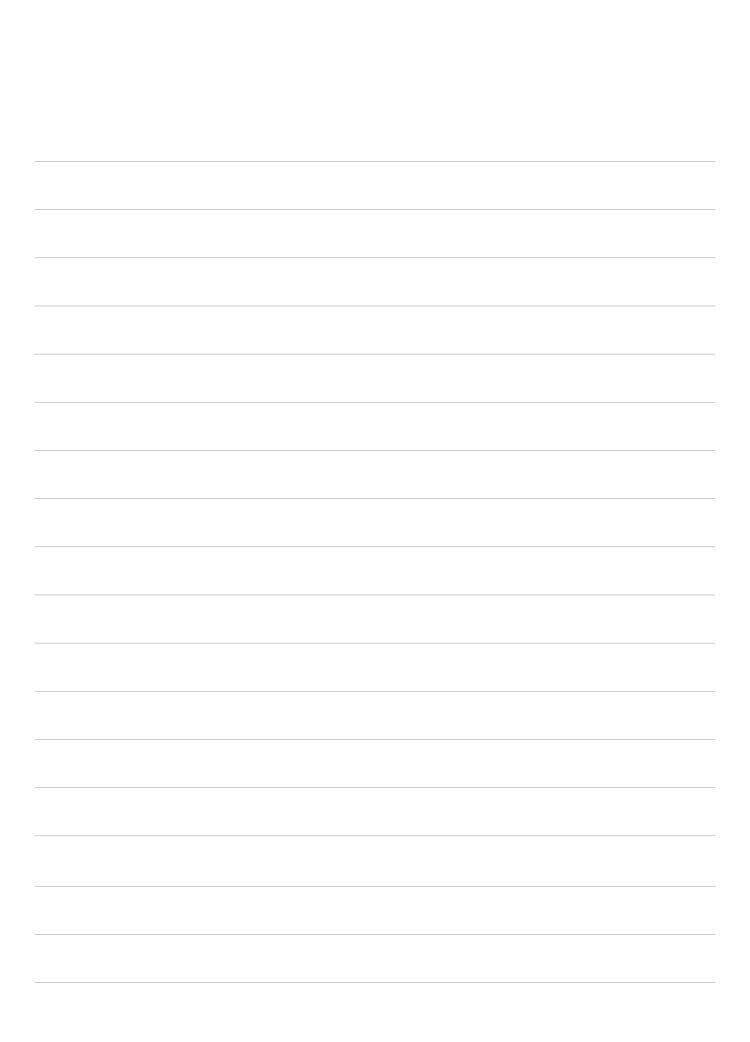

NOTES		
		_
		_
		_



Vendor:



HS Flamingo s.r.o. třída Osvobození 65, CZ - 550 01 Broumov, Czech Republic

tel.: +420 491 422 647, fax: +420 491 521 140 e-mail: export@hsflamingo.cz

www.hsflamingo.com